

# Model 206L

## High Efficiency Cabinet Power Supply Operations Manual

SERIAL NUMBER: 1711XXXXX and higher  
PCB Issue E, 010-0206-001

REVISION: NOVEMBER 2017  
pn 888-0206-002



EBERLE DESIGN INC.

3510 East Atlanta Avenue Tel (480) 968-6407  
Phoenix, AZ 85040 USA Fax (602) 437-1996  
www.EDIttraffic.com





## Table of Contents

Section 1 Glossary .....	1
Section 2 General .....	1
Section 3 General Characteristics.....	1
Section 4 Installation.....	1
Section 5 Adjustments .....	1
Section 6 Theory of Operation .....	1
6.1 System Description.....	1
6.2 Circuit Operation.....	2
6.3 Specifications .....	2
Section 7 Maintenance .....	2
7.1 Trouble Analysis .....	3
7.2 Wave Forms .....	3
Section 8 Technical Information.....	4
8.1 Schematics .....	4
8.2 Bill of Materials .....	6
8.3 Assembly Drawing.....	9
8.4 Connector .....	10

## SECTION 1 GLOSSARY

A	Amperes	mVpp	millivolt peak to peak
AC	Alternating Current	PCB	Printed Circuit Board
C	Celcius	PDA	Power Distribution Assembly
DC	Direct Current	PFC	Power Factor Correction
EG	Equipment Ground	RMS	Root Mean Square
F	Farenheit	uF	micro farad
Hz	Hertz	VAC	Voltage Alternating Current
LED	Light Emitting Diode	VDC	Voltage Direct Current
m	milli		

## SECTION 2 GENERAL

The Model 206L Cabinet Power Supply is a rack mounted high efficiency switching power supply that provides a single regulated +24VDC output for a PDA #2 or PDA #3 assembly commonly found in a 332 or 336 style cabinet. The Model 206L is plug-in compatible with a Caltrans Model 206 Cabinet Power Supply.

## SECTION 3 GENERAL CHARACTERISTICS

The Model 206L provides full output regulation across changes in AC Line voltage and output load over the full operating temperature range of -34C to +74C. Power Factor Correction is also provided reducing peak AC Line input current and associated stress on wiring. The AC Line input is rated for 80 to 270 Vac operation at 50 or 60 Hz.

## SECTION 4 INSTALLATION


The Model 206L is a rack mounted device that requires no adjustments or programming when installed. The Model 206L requires no maintenance or periodic adjustments.

## SECTION 5 ADJUSTMENTS

The Model 206L requires no adjustments or programming. Test jacks are provided to measure the 24VDC output.

## SECTION 6 THEORY OF OPERATION

### 6.1 SYSTEM DESCRIPTION

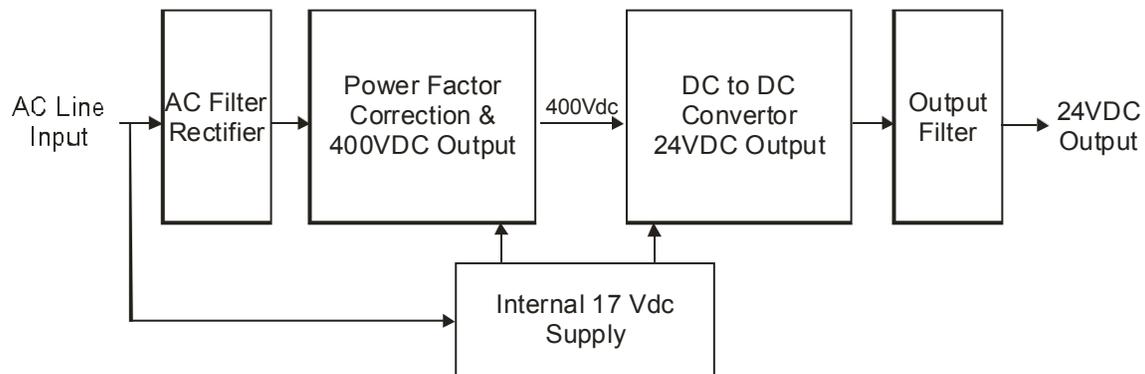

## 6.2 CIRCUIT OPERATION

The internal 17Vdc supply is a buck type integrated switching supply used to generate the 17Vdc voltage which supplies operating power to both the PFC and 24VDC output controller circuits. The integrated controller (U6) uses rectified AC from C29 and down converts it to 17 Vdc (VCC). The front panel LED (DS1) indicates the AC Line is applied and the 17 Vdc output is active.

The AC Filter and Rectifier circuit converts the incoming AC Line voltage to a rectified voltage at T1.2. Filter network C11, R45, R46, T3, and C27 prevent high frequency switching noise from being coupled back into the AC Line. The AC input is fused for over-current protection with a 3 Amp slow blow fuse.

The integrated PFC controller (U1) converts this rectified voltage to a 400 Vdc value (HV+) stored in C29. Comparator circuit U2-A is used to shut down the PFC controller during low AC Line conditions. **Caution: Internal LED DS3 is used to warn a service technician that high voltage is present on C29 (HV+).**

DC to DC Controller (U5) down converts the 400 Vdc to create an isolated and regulated +24 Vdc output at C8, C9, and C10. Components L1, C6, and C7 filter out switching noise to the output. The front panel LED DS2 indicates that the 24Vdc output is active. Signal PFC\_RDY is used to shut down the DC to DC Controller (U5) during low AC Line conditions.

The output is fused for over-current protection with an 8A slow blow fuse. The output is protected against voltage transients by a 1500 Watt suppressor (Z1).

## 6.3 SPECIFICATIONS

AC Operating Voltage Minimum .....	80 Vac
AC Operating Voltage Maximum .....	270 Vac
AC Operating Frequency .....	45 to 65 Hz
Power Factor (120 Vac at full load).....	0.98
Efficiency (120 Vac at full load).....	86%
DC Output Voltage.....	24 Vdc +/- 1 Vdc
DC Output Current Maximum.....	5 Amps
DC Output Ripple Maximum .....	200 mVpp
Note: Ripple is measured at 20MHz of bandwidth using a 12" twisted pair-wire terminated with a 0.1uf & 47uf capacitor.	
Minimum Holdup Time (5 Amp load).....	50 milliseconds
Height .....	6.0 inches
Width.....	5.5 inches
Depth (excluding handle & connector pins) .....	7.35 inches
Storage Temperature Range .....	-45 to +85 °C
Operating Temperature Range .....	-34 to +74 °C
Humidity (non-condensing) .....	0 to 95% Relative

## SECTION 7 MAINTENANCE




A green LED indicator is provided to display AC Line input status and fuse integrity. A separate green LED indicator is provided to display output status and fuse integrity for the 24VDC output.

The Model 206L requires no adjustments or programming. Test jacks are provided to measure the 24VDC output.

### 7.1 TROUBLE ANALYSIS


- 1) AC Line indicator DS1 is not illuminated:
  - a. Check that AC Line input fuse (F2) is not blown. Replace with 3A SB fuse.
  - b. Check that AC Line voltage is greater than 80 Vac.
  - c. Check that internal 17Vdc supply is operating (VCC).
- 2) DC Output indicator DS2 is not illuminated:
  - a. Check that internal 17Vdc supply is operating.
  - b. Check that DC output fuse (F1) is not blown. Replace with 8A SB fuse.
  - c. Check that PFC Controller is providing 400 Vdc at HV+, DS3 should be illuminated.
- 3) DC Output is not active:
  - a. Check that the DC to DC controller has not shut down because of an output load that exceeds the maximum value. Once the overload is removed a power cycle will reset the operation of the controller.

### 7.2 WAVE FORMS

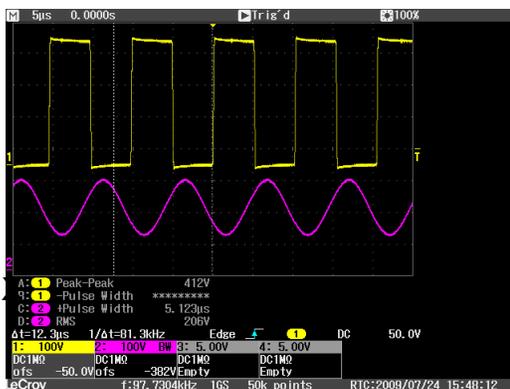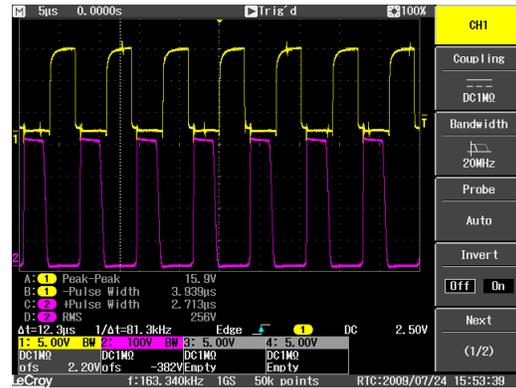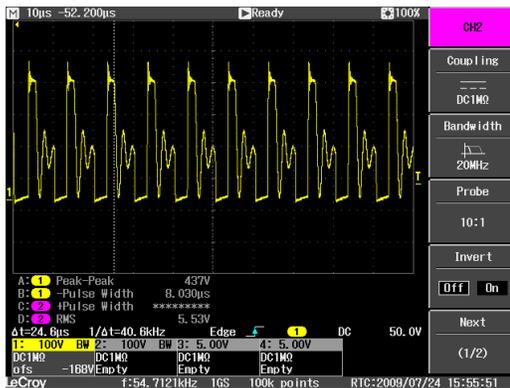


# Model 206L Cabinet Power Supply Operations Manual

## SECTION 8 TECHNICAL INFORMATION 8.1 SCHEMATICS

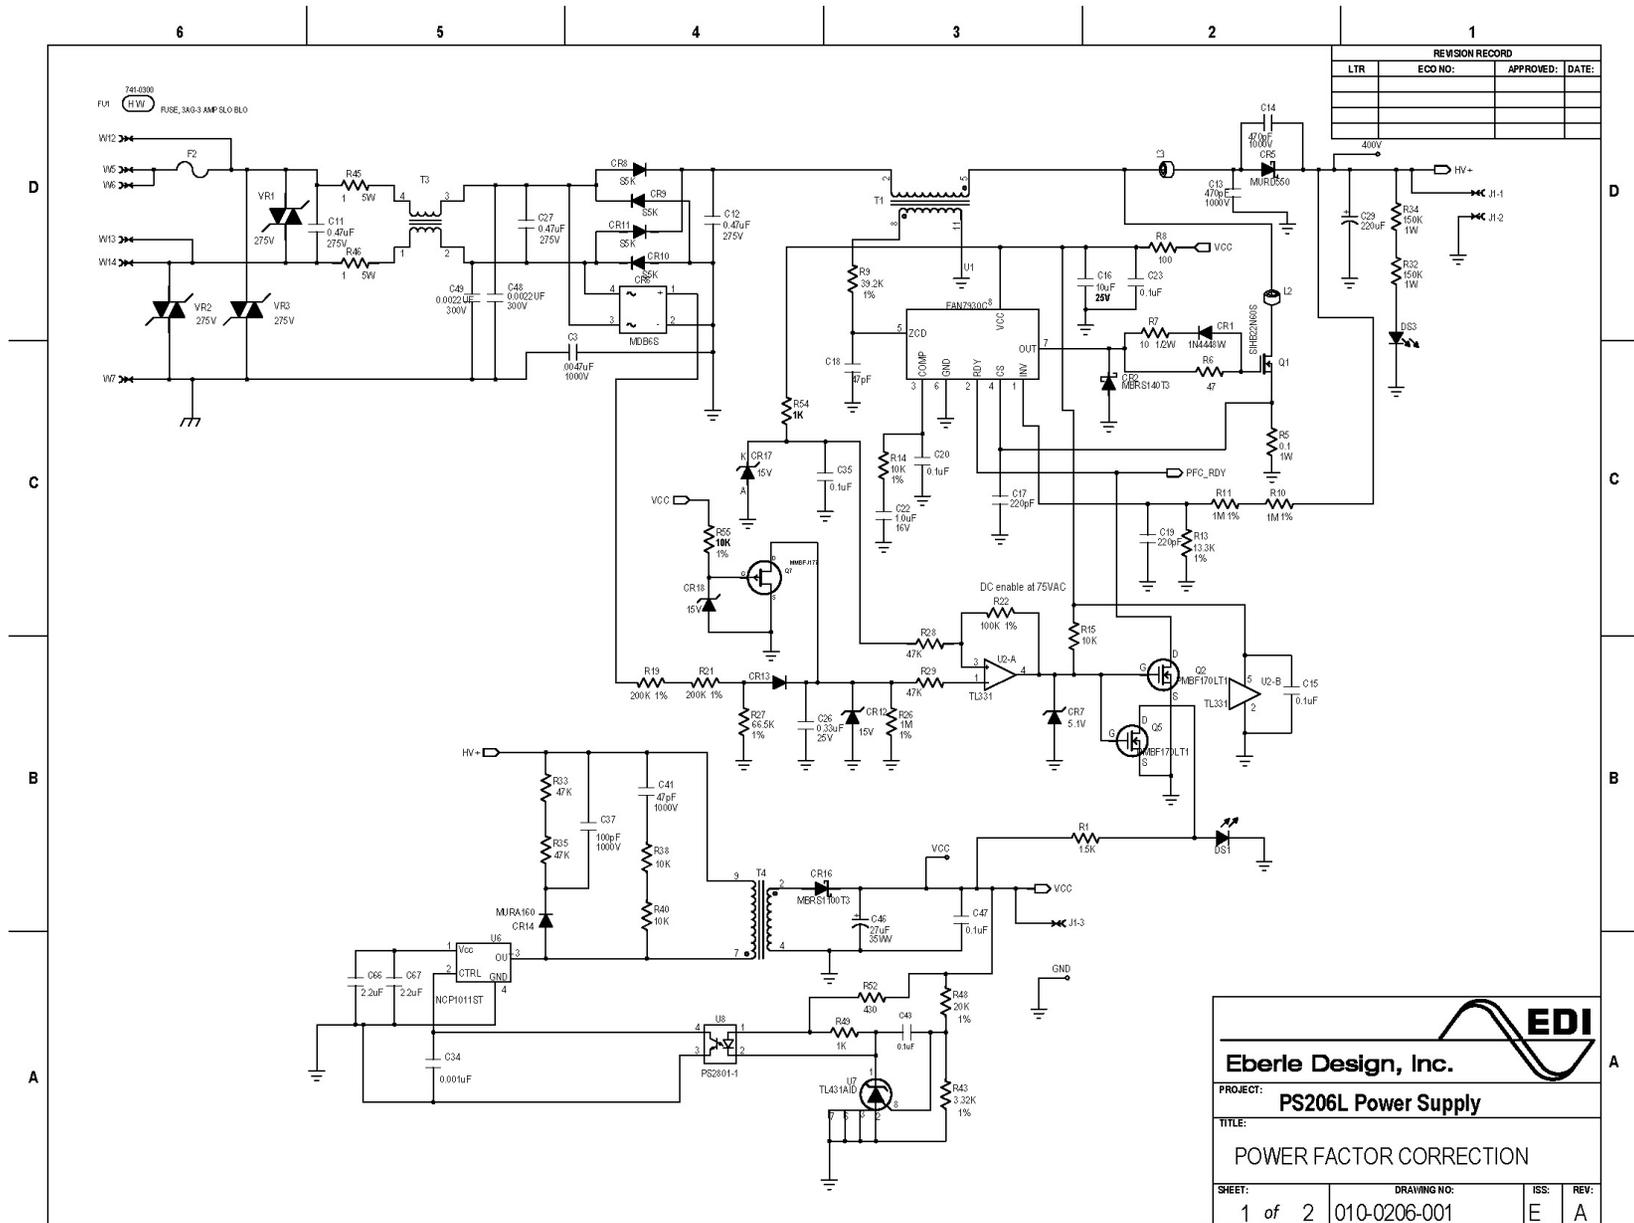

# Model 206L Cabinet Power Supply Operations Manual

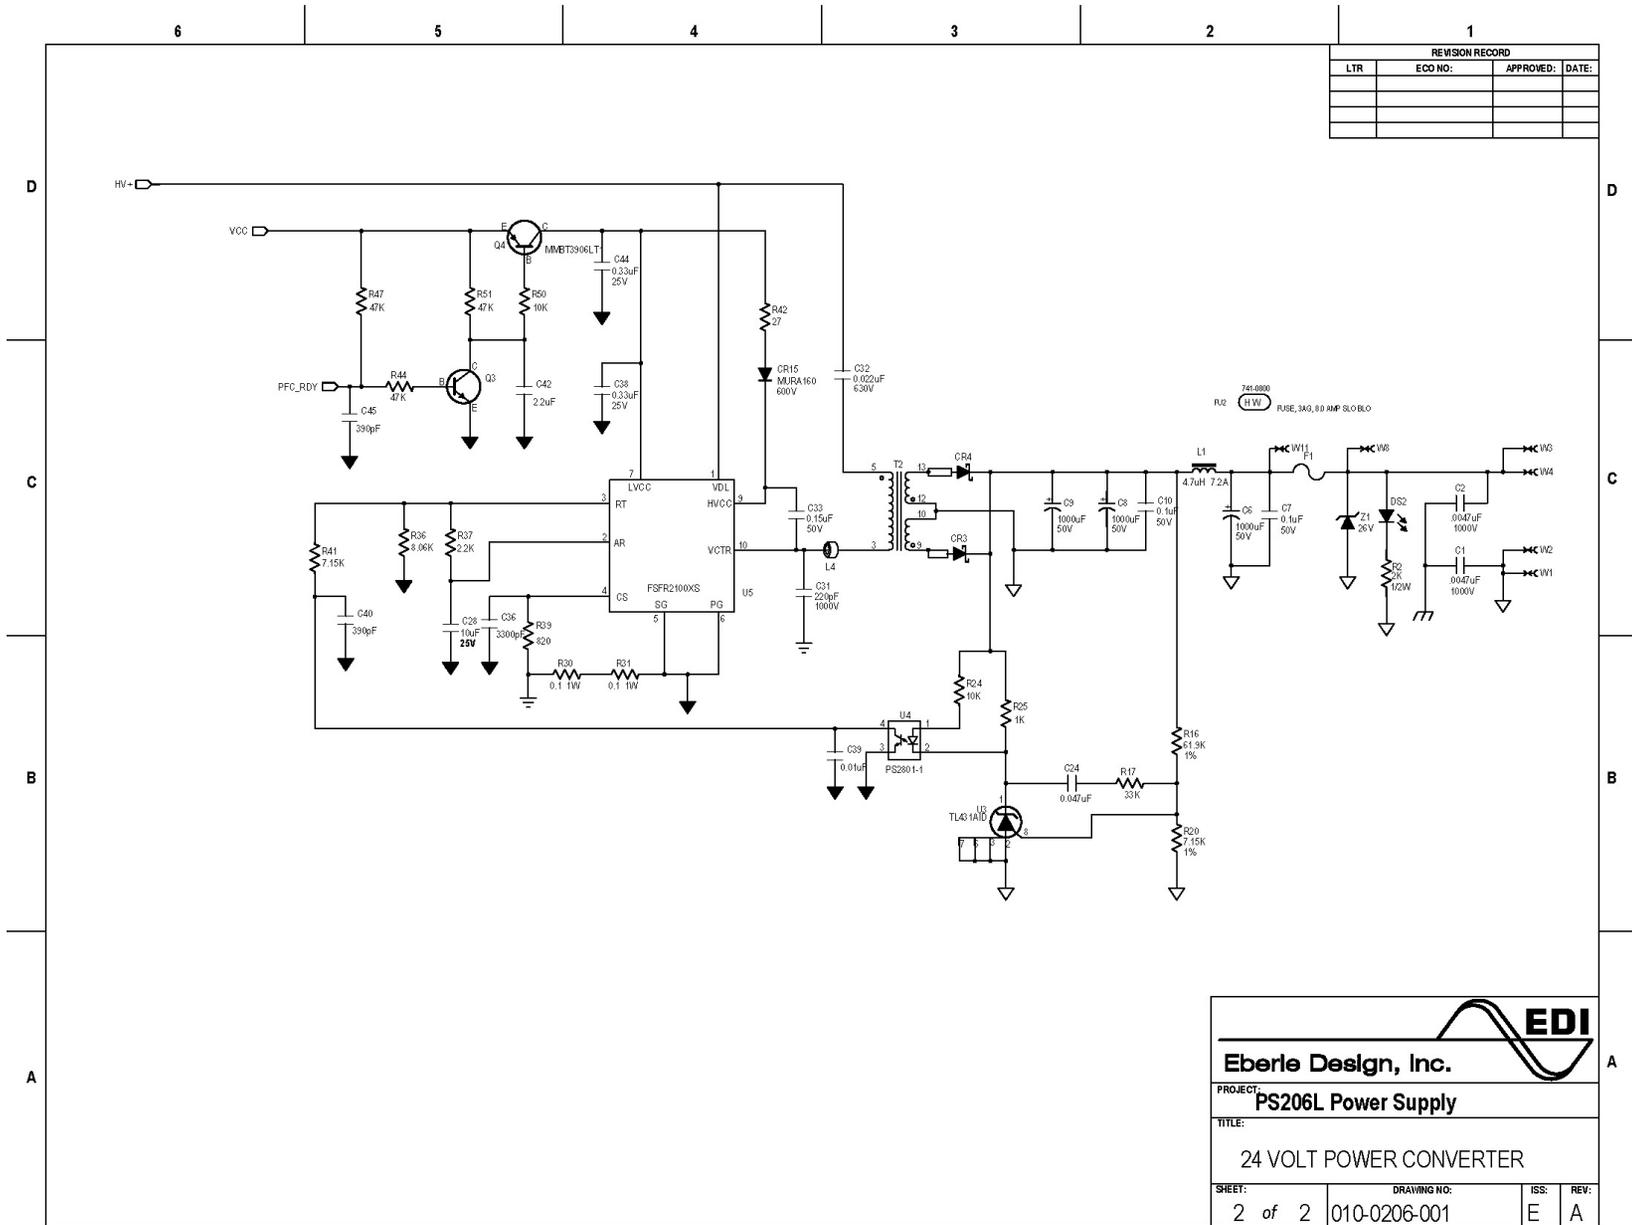

**Eberle Design, Inc.**

PROJECT: **PS206L Power Supply**

TITLE: **24 VOLT POWER CONVERTER**

SHEET:	DRAWING NO.:	ISS:	REV:
2 of 2	010-0206-001	E	A

Model 206L Cabinet Power Supply  
Operations Manual

**8.2 BILL OF MATERIALS**

Item	EDI Part Number	Qty	Description	Reference	Manufacturer
1		3	(NO COMPONENT)	400V GND VCC	
2		11	16 guage wire mounting hole	W1-8 W11 W13-14	
3		1	22 guage wire mounting hole	W12	
4	215-1000-S	1	RESISTOR, 1/2W, 10 OHMS, 5%, 2010 surface mount	R7	
5	215-1030-S	2	Resistor, 10K, 1/2W, 5%, 2010 surf. mnt.	R38 R40	
6	215-1520-S	1	Resistor, 1.5K, 1/2W, 5%, 2010 surf. mnt.	R1	
7	215-2020-S	1	Resistor, 2K, 1/2W, 5%, 2010 surf. mnt.	R2	
8	215-4700-S	1	RESISTOR, 1/2W, 47 OHMS, 5%, 2010 surface mount	R6	
9	220-0001-S	3	RESISTOR, 1W, 0.1 OHMS, 1%, 2010 surface mount	R5 R30-31	
10	220-1540-S	2	RESISTOR, 1W, 159K, 5%, 2512 SMD	R32 R34	Vishay CRCW2512154
11	225-0010	2	RESISTOR, 1.0 Ohm, 5W, 5%, RADIAL	R45-46	OHMITE TWW5J1R0E
12	251-1002-S	2	RESISTOR, 1/8W, 10K, 1%, 1206 surface mount	R14 R55	
13	251-1003-S	1	RESISTOR, 1/8W, 100K, 1%, 1206 surface mount	R22	
14	251-1004-S	3	RESISTOR, 1/8W, 1M, 1%, 1206 surface mount	R10-11 R26	
15	251-1332-S	1	RESISTOR, 1/8W, 13.3K, 1%, 1206 surface mount	R13	
16	251-2002-S	1	RESISTOR, 1/8W, 20K, 1%, 1206 surface mount	R48	
17	251-2003-S	2	RESISTOR, 1/8W, 200K, 1%, 1206 surface mount	R19 R21	
18	251-3321-S	1	RESISTOR, 1/8W, 3.32K, 1%, 1206 surface mount	R43	
19	251-3922-S	1	RESISTOR, 1/8W, 39.2K, 1%, 1206 surface mount	R9	
20	251-6192-S	1	RESISTOR, 1/8W, 61.9K, 1%, 1206 surface mount	R16	
21	251-6652-S	1	RESISTOR, 1/8W, 66.5K, 1%, 1206 surface mount	R27	
22	251-7151-S	2	RESISTOR, 1/8W, 7.15K, 1%, 1206 surface mount	R20 R41	
23	251-8061-S	1	RESISTOR, 1/8W, 8.06K, 1%, 1206 surface mount	R36	
24	255-1010-S	1	RESISTOR, 1/8W, 100, 5%, 1206 surface mount	R8	
25	255-1020-S	3	RESISTOR, 1/8W, 1K, 5%, 1206 surface mount	R25 R49 R54	
26	255-1030-S	3	RESISTOR, 1/8W, 10K, 5%, 1206 surface mount	R15 R24 R50	
27	255-2220-S	1	RESISTOR, 1/8W, 2.2K, 5%, 1206 surface mount	R37	
28	255-2700-S	1	RESISTOR, 1/8W, 27 Ohm, 5%, 1206 surface mount	R42	
29	255-3330-S	1	RESISTOR, 1/8W, 33K, 5%, 1206 surface mount	R17	
30	255-4310-S	1	RESISTOR, 1/8W, 430 Ohm, 5%, 1206 surface mount	R52	
31	255-4730-S	7	RESISTOR, 1/8W, 47K, 5%, 1206 surface mount	R28-29 R33 R35 R44	
				R47 R51	
32	255-8210-S	1	RESISTOR, 820, 1/8W, 5%, SMT 1206	R39	
33	300-1081-050R	3	CAPACITOR, ELECT, 1000uF, 50WV, 20 %, LOW ESR,RDL	C6 C8-9	ILLINOIS 108RZM050M
34	300-2270-450R	1	CAPACITOR, ELECT, 220uF, 450WV, 20 %, RDL	C29	


## Model 206L Cabinet Power Supply Operations Manual

35	300-2760-035S	1	CAPACITOR, ELECTROLYTIC, 27uF, 35V, LOW ESR, 20%,	C46	ILLINOIS
			SMT		276AXZ035MD10
36	320-1010-1000S	1	CAPACITOR, CER.MULT, 100pF, 1000V, 10%,C0G,1206	C37	AVX 1206AA101KAT1A
			CHIP		
37	320-1020-050S	1	CAPACITOR, CER.MULT, 0.001uF, 50V, 10%, 1206 CHIP	C34	
38	320-1030-100S	1	CAPACITOR, CER.MULT, 0.01uF, 100V, 10%, 1206 CHIP	C39	
39	320-1040-050S	8	CAPACITOR, CER.MULT, 0.1uF, 50V, 10%, 1206 CHIP	C7 C10 C15 C20 C23	
				C35 C43 C47	
40	320-1050-016S	1	CAPACITOR, CER.MULT, 1.0uF, 16V, 10%, 1206	C22	ECJ-3VF1C105Z
41	320-1060-025S	2	CAPACITOR, CER.MULT, 10uF, 25V, 10%, 1206 CHIP	C16 C28	Samsung
					CL31A106KAHNNNE
42	320-1540-050S	1	CAPACITOR, CER.MULT, 0.15uF, 50V, 10%, 1206 CHIP	C33	
43	320-2210-050S	2	CAPACITOR, CER.MULT, 220pF, 50V, 10%, 1206 CHIP	C17 C19	
44	320-2210-1000S	1	CAPACITOR, CER.MULT, 220pF, 1000V, 10%,C0G,1206	C31	AVX 1206AA221KAT1A
			CHIP		
45	320-2250-050S	3	CAPACITOR, CER.MULT, 2.2uF, 50V, 10%, 1206 CHIP	C42 C66-67	Murata
					GRM31CR71H225KA88L
46	320-3320-050S	1	CAPACITOR, CER.MULT, 3300pF, 50V, 10%, 1206 CHIP	C36	
47	320-3340-025S	3	CAPACITOR, CER.MULT, 0.33uF, 25V, 10%, 1206	C26 C38 C44	
48	320-3910-050S	2	CAPACITOR, CER.MULT, 390pF, 50V, 10%, 1206 CHIP	C40 C45	
49	320-4700-050S	1	CAPACITOR, CER.MULT, 47pF, 50V, 10%, 1206 CHIP	C18	
50	320-4700-1000S	1	CAPACITOR, CER.MULT, 47pF, 1000V, 10%,X7R,1206	C41	AVX 1206AC470KAT1A
			CHIP		
51	320-4710-1000S	2	CAPACITOR, CER.MULT, 470pF, 1000V, 10%,C0G,1206	C13-14	AVX 1206AA471KAT1A
			CHIP		
52	320-4720-1000S	3	CAPACITOR, CER.MULT, 4700pF, 1000V, 10%, X7R,1206	C1-3	AVX 1206AC472KAZ1A
			CHIP		
53	320-4730-050S	1	CAPACITOR, CER.MULT, 0.047uF, 50V, 10%, 1206	C24	
54	330-2230-630R	1	CAPACITOR, POLYPRO, 0.022uF,630V, 5%, RDL	C32	PANASONIC
					ECW-F6223HL
55	335-2220-300R	2	CAPACITOR, Y2, 0.0022UF, 300V, 20%, METALIZED	C48-49	Epcos
			FILM, 10mm		B32021A3222M189
56	335-4740-275R	3	CAPACITOR, 0.47uF, 275VAC, 20%, METALIZED FILM	C11-12 C27	PANASONIC
					ECQU2A474ML
57	405-0311-S	1	IC, TL331IDBVR, COMPARATOR,5 PIN SOT	U2	TEXAS INSTRUMENTS
					TL331IDBVR
58	410-0006-S	1	DIODE, BRIDGE, MDB6S, 600V,1A, MICRO-DIP	CR6	FAIRCHILD MDB6S
59	410-0140-S	1	DIODE, SCHOTTKY, MBRS140T3, 40V,1A, SMB	CR2	ON SEMI
60	410-0160-S	2	DIODE, ULTRAFAST, MURA160T3, 600V,1A, SMA	CR14-15	ON SEMI
61	410-0550-S	1	DIODE, ULTAFAST, MURD550PFT4, 520V,5A, DPAK	CR5	ON SEMI
62	410-1100-S	1	DIODE, SCHOTTKY, MBRS1100T3, 100V,1A, SMB	CR16	ON SEMI

## Model 206L Cabinet Power Supply Operations Manual

63	410-1526-S	1	TRANSORB, SMCJ26A, 26V, 1500W	Z1	DIODES, INC.
64	410-4448-S	2	DIODE, HI SPD SWITCHING, 1N4448W, SOD123	CR1 CR13	VISHAY
65	410-5231-S	1	DIODE, ZENER, MMBZ5231BLT1, 5.1V, 225mW, SOT-23	CR7	ON SEMI
66	410-5245-S	2	DIODE, ZENER, MMBZ5245BLT1, 15V, 225mW, SOT-23	CR12 CR18	ON SEMI
67	410-5245-S	1	ZENER, 1N5245B, 0.5W, 5%, 15V	CR17	ON SEMI
68	410-5800-S	4	DIODE, RECTIFIER, SILICON, S5KL, 800V, 5A, SMC	CR8-11	DIODES Inc
69	410-8010-S	2	DIODE, SCHOTTLY, SS8PH10, 100V, 8A, D2PAK	CR3-4	VISHAY SS8PH10
70	420-2811-S	2	OPTOCOUPLER, PS2801-1, 4 PIN SOP	U4 U8	NEC PS2801-1
71	425-0150-RS	1	LED, RED, WC LENS, 1206, FLAT, SMT	DS3	LITEON
					LTST-C150KRKT
72	425-0322-G	2	LED, GREEN, T1, RIGHT ANGLE, WITH LOCATING PINS	DS1-2	SUNLED XPV1LUG147D
73	430-0177-S	1	TRANSISTOR, MMBFJ177, NPN, SOT-23	Q7	On Semi MMBJ177LT1G
74	430-1700-S	2	N-CHANNEL MOSFET, PMBF170LT1	Q2 Q5	MOTOROLA
75	430-2260-S	1	TRANSISTOR, SIHB22N60E, MOSFET, 650V, 22A, D2PAK	Q1	Vishay
					SiHB22N60E
76	430-3904-S	1	TRANSISTOR, MMBT3904LT1, NPN, SOT-23	Q3	
77	430-3906-S	1	TRANSISTOR, PNP, MMBT3906LT1, SOT23	Q4	
78	440-0431-S	2	REGULATOR, TL431AID, VOLTAGE REF., 1%, SO8	U3 U7	MOTOROLA
79	440-1011-S	1	REGULATOR, SWITCHING, OFFLINE, NCP1011ST130T3G	U6	ON SEMI
					NCP1011ST130T3G
80	440-2101	1	IC, FSFR2100XS, PWR. SUPPLY CNTLR	U5	FAIRCHILD
					FSFR2100XS
81	440-3275	3	REGULATOR, METAL OXIDE VARISTOR, V275LA40A, 20mm	VR1-3	
82	440-7930-S	1	IC, FAN7930CMX, PF CNTLR, SO8	U1	Fairchild
					FAN7930CMX
83	520-0429-P	1	CONNECTOR, HEADER, 3-Pin, Mate-N-Lock	J1	Tyco (AMP)
					350429-1
84	740-0022	2	FUSE, HOLDER PCB HORIZONTAL MOUNT	F1-2	LITTELFUSE
85	800-0140-S	1	TRANSFORMER, PCMT, OFFLINE, 2.5W	T4	Signal H-1480
86	800-0182	1	TRANSFORMER, COMMON MODE FILTER, 3.2mH, 2.2A	T3	CWS 24V-3K2
87	800-0191	1	TRANSFORMER, PFC, 200uH, With MTG Clips	T1	Santronics
					SNX-R2127
88	800-0200	1	TRANSFORMER, PCMT, OFFLINE, 200W, DUAL SEC.	T2	Santronics SNX2446
89	850-1047-S	1	INDUCTOR, 4.7uH, 7.2A, SURFACE MOUNT	L1	SIGNAL
					SC3326F-4R7
90	860-0100-S	3	BEAD, FERRITE, TYPE 61, SMT	L2-4	FAIR-RITE
					2761021447

8.3 ASSEMBLY DRAWING

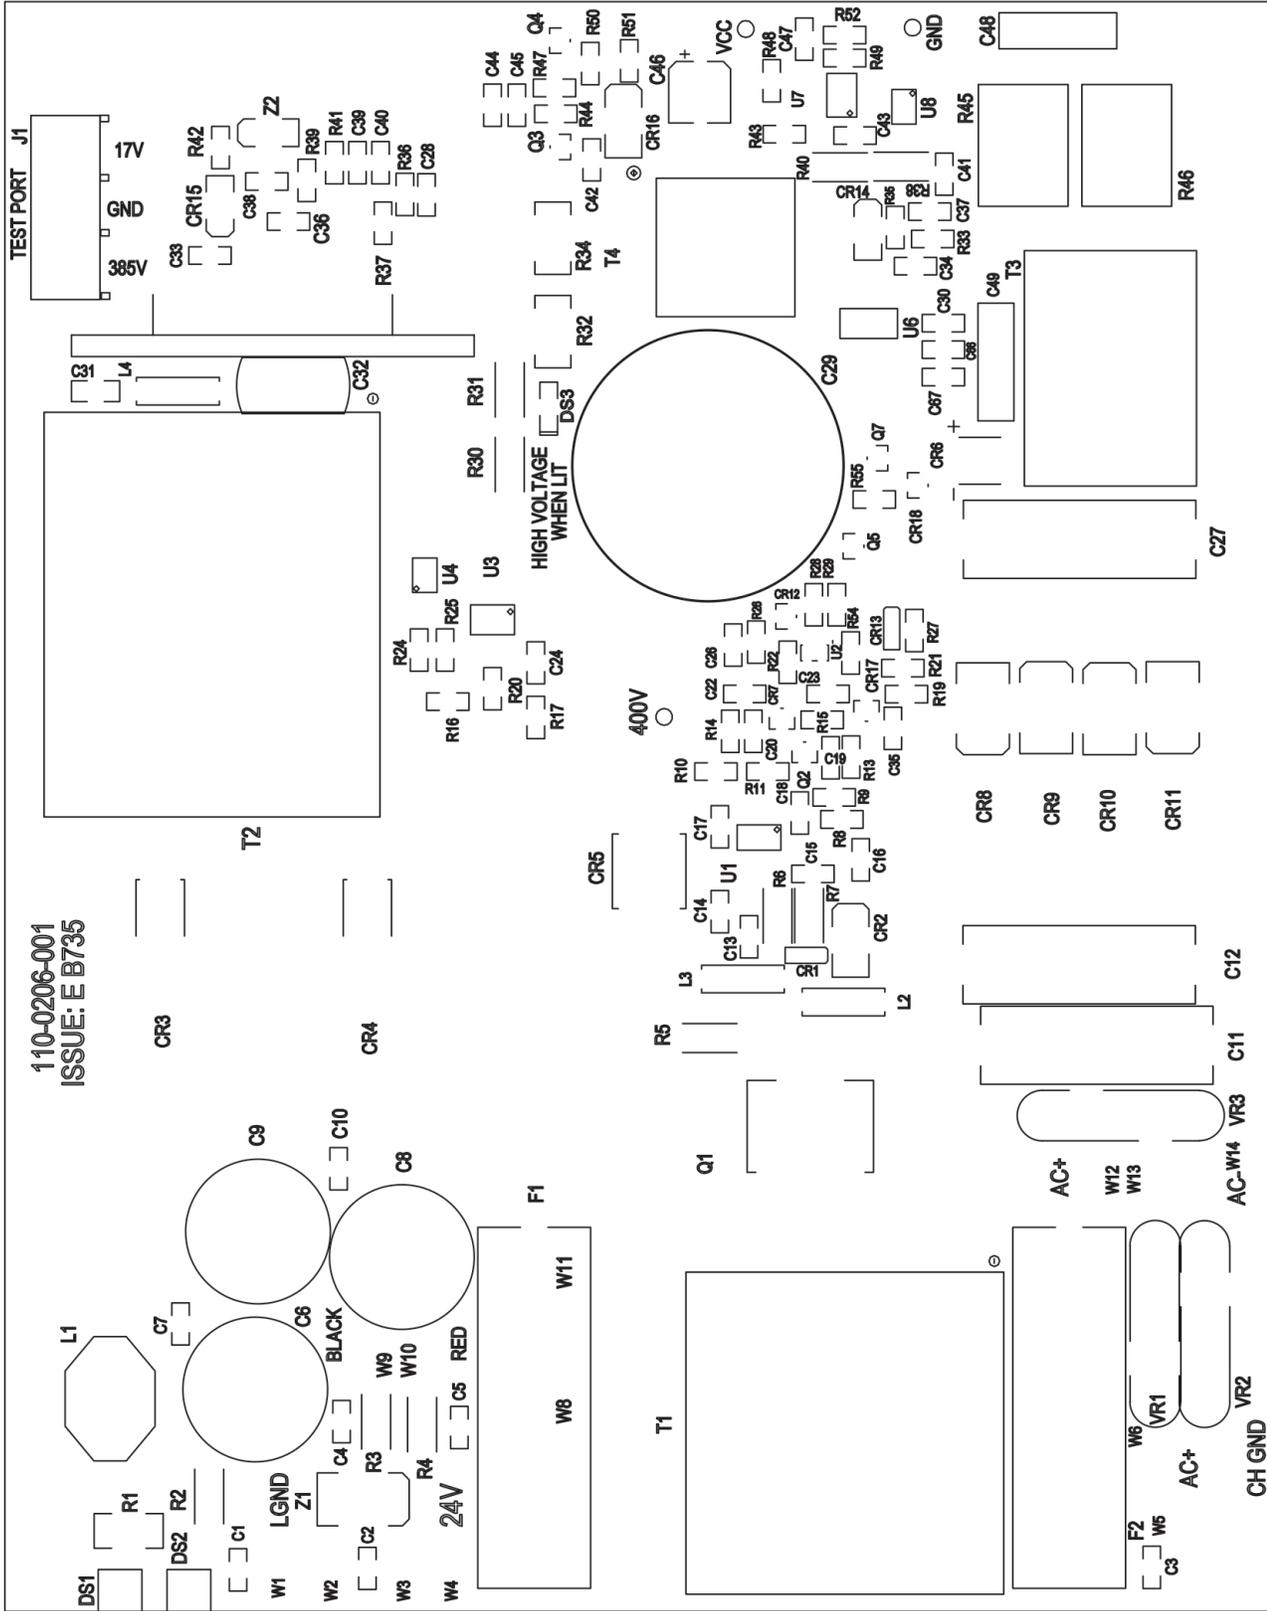

Model 206L Cabinet Power Supply  
Operations Manual

---

### 8.4 CONNECTOR

Connector intermates with Beau S-5406 or equivalent:

Pin	Function	Pin	Function
7	+24VDC Output	10	No Connect
8	DC Ground	11	AC Neutral
9	Equipment Ground	12	AC Line +

