



**Reno A & E**  
4655 Aircenter Circle  
Reno, NV 89502-5948 USA  
Telephone: (775) 826-2020  
Fax: (775) 826-9191  
Website: www.renoae.com  
E-mail: contact@renoae.com



*Engineering Excellence!*


## PLH Preformed Loop Installation Instructions

### Asphalt Overlay:

1. Place the PLH Preformed Loop in the proper position and orientation on the asphalt base lift.
2. Route the lead-in cable to the desired termination point.
3. Use the fiberglass backed mastic tape cut into 2" x 4" or 3" x 4" strips to hold the loop and lead-in cable in place.
4. Apply the top lift.

### Note:

When applying the top lift, make certain that the loop cable does not get pulled into the augers on the paving machine.

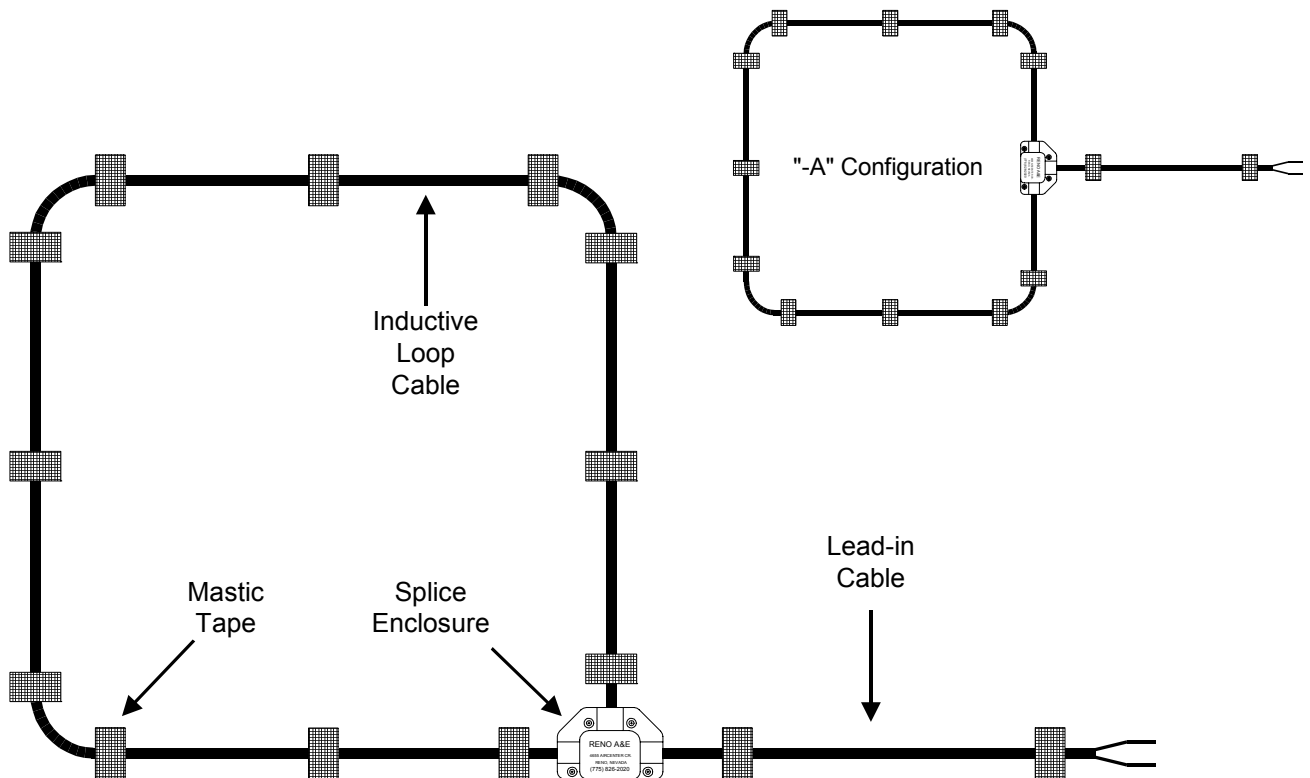

## Poured Concrete:

1. Place the PLH Preformed Loop in the proper position and orientation on top of the concrete reinforcing steel.
2. Route the lead-in cable to the desired termination point.
3. Cut an appropriate number of  $\frac{1}{2}$ " poly insert tees as shown in Figure 1. Cut an equal number of lengths of  $\frac{3}{8}$ " rebar.
4. Use the tees, rebar and nylon cable ties to hold the loop cable in place. See Figure 2. The lead-in cable can be tied directly to the concrete reinforcing steel.
5. Pour the concrete making certain not to disturb the loop cable.

## Notes:

1. The rebar should be cut long enough to allow it to be driven firmly into the ground to hold the tee securely at the correct height above the concrete reinforcing steel.
2. Spacing of the Tee / rebar supports should be such that no more than 2 feet of cable is unsupported.
3. If the thickness of the concrete slab and/or the depth of the reinforcing steel below the top of the slab is such that the minimum dimensions shown in Figure 2 cannot be achieved, contact Technical Support at Reno A & E for guidance.

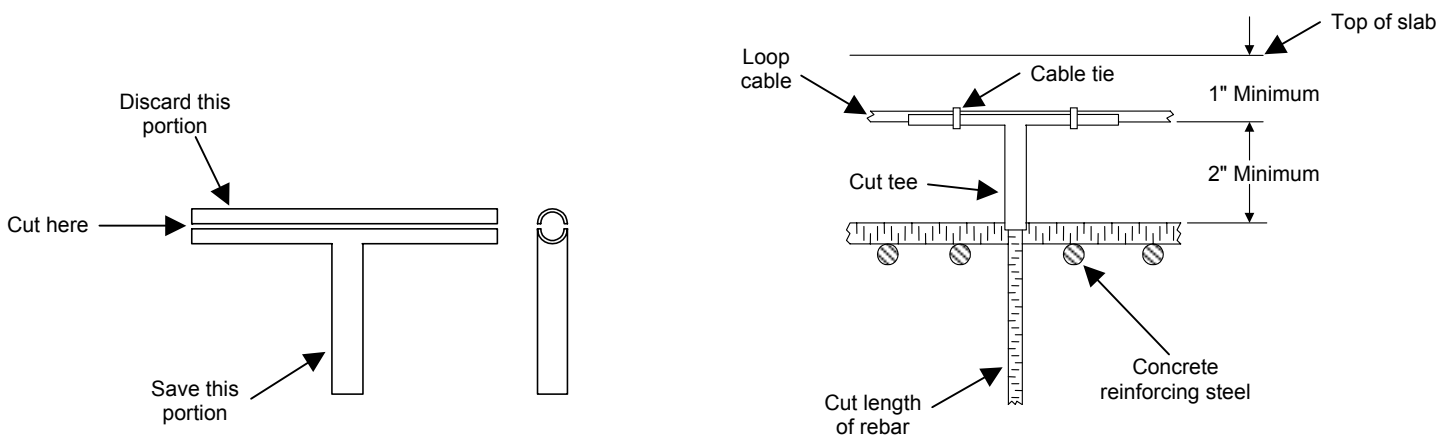
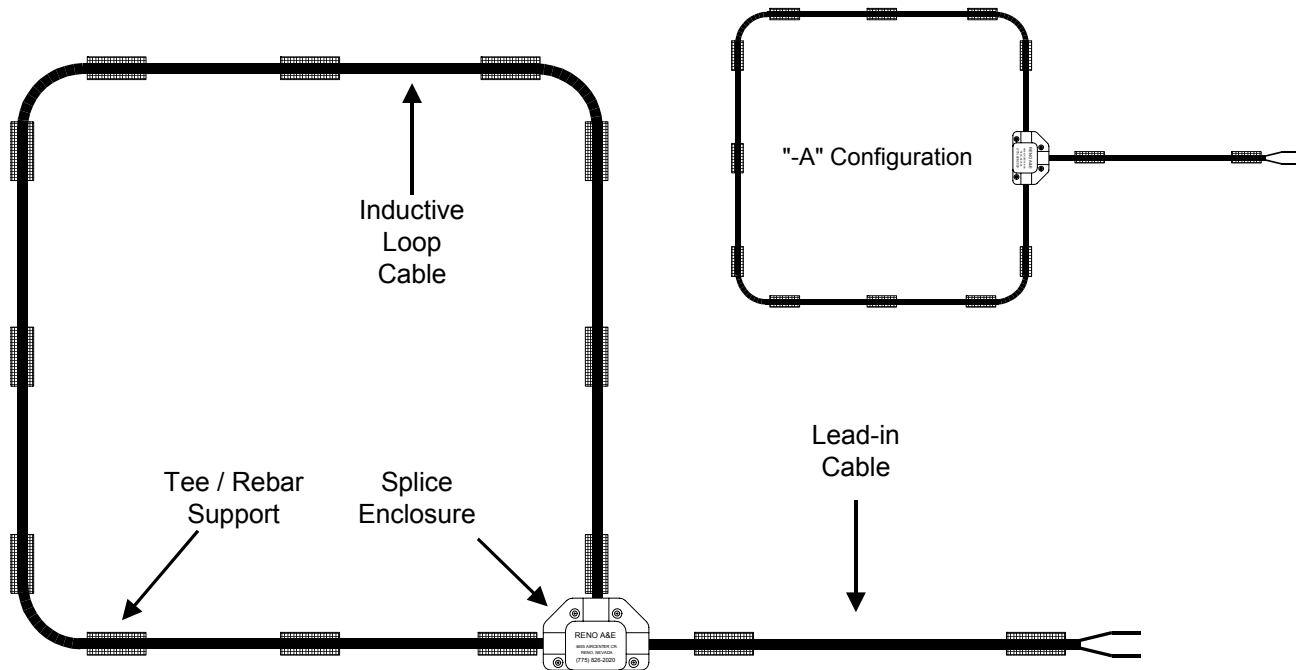


Figure 1

Figure 2